




The Realistic Pressure Zone Microphone has been discontinued, and there is no longer an online Tandy/Radio Shack technical information source for that product.

The following data are taken from the original published technical specifications.

Frequency Response	20 Hz – 18 kHz
Impedance	600 Ω
Sensitivity	-74 dBV @ 1 kHz
Polar Pattern	Hemispherical (i.e. Omnidirectional, half-space)
Battery	1.5V AA
Battery Life	2,000 hours
Cable	5m x 3.5mm & 0.6m x 4.0mm
Output Connector	¼" mono jack ¹
Weight	420g

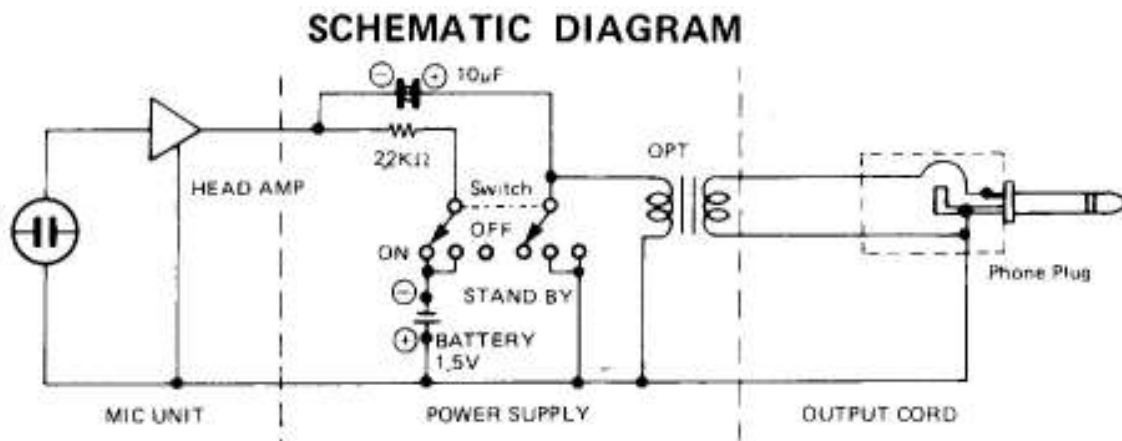

1. We have replaced the unbalanced (unbranded) ¼" jack plug originally supplied with balanced (Neutrik) Male XLR connector. The output of the modified unit is balanced.